

Update procedure Confidea G3 from version 1.11 to version 2.x

1. Files needed :

Following files are needed and can be found on <https://we.tl/FqI1AayUBZ>

- ap.golden.tuf
- ap.upgrade.tuf

REMARK : Before starting the update pls take note of the following

This update includes a major change in the software , and as consequence after this update:

- **It will no longer be possible to downgrade to a version lower than 2.0!**
- **All existing configuration and initialization data will have been erased, so the initialization will have to be restarted and the WCAP will have to be reconfigured, therefore it is recommended that all existing configuration settings are noted before starting the update procedure!**

2. Step by step procedure


1. Hard reset the WCAP.

- a. Turn off the WCAP
- b. Push and hold the RESET button




- c. Turn on the WCAP while holding the RESET button down.
- d. Hold the RESET button and release after 10 seconds.
- e. Wait until WCAP has been booted. The WCAP should have a fixed red LED instead of the fixed green LED.


2. Enter the update screen in **WCAP** webserver
3. Select **ap.golden.tuf** file and click on “install updates”

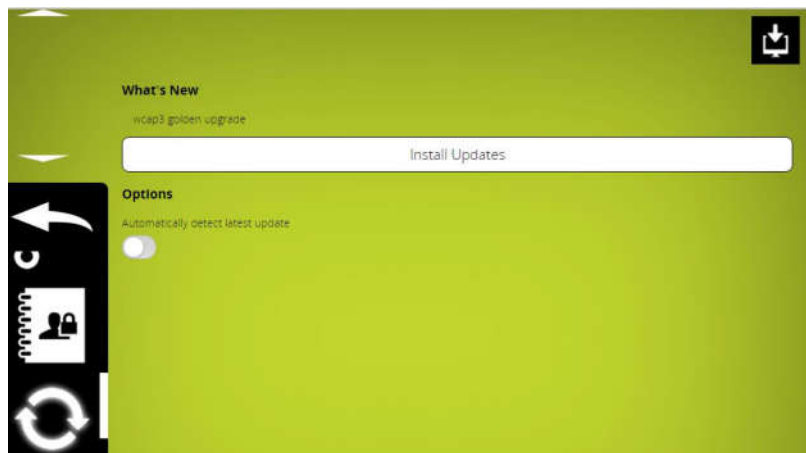


4. After a few seconds following screen appears


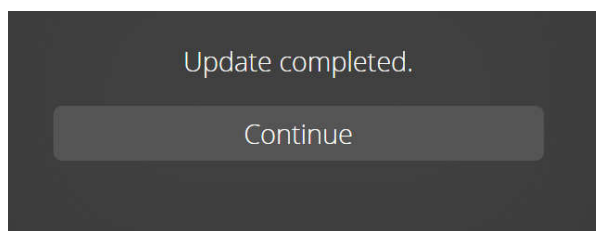


5. Click "Continue" and following screen appears

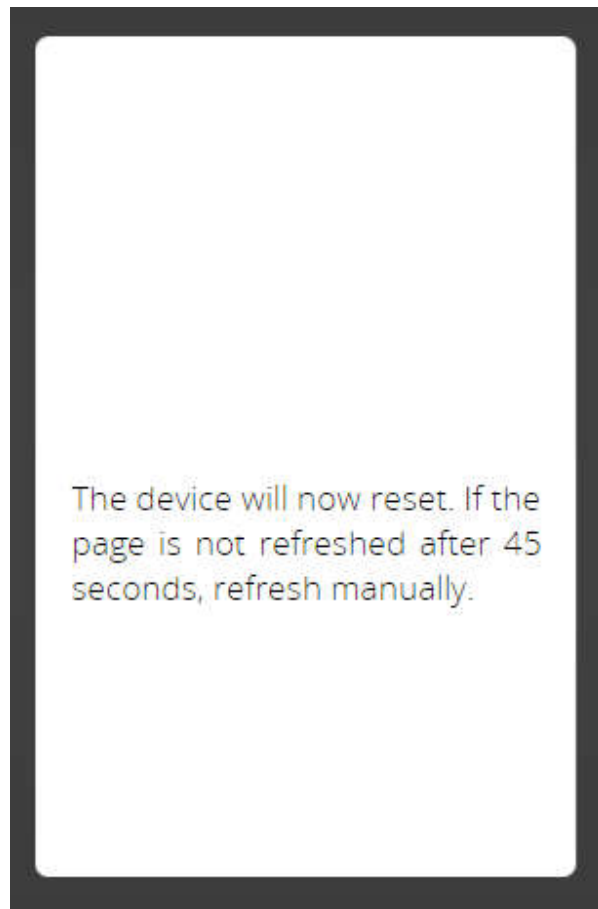

6. Select "choose file" and browse to ap.upgrade.tuf + click on upload

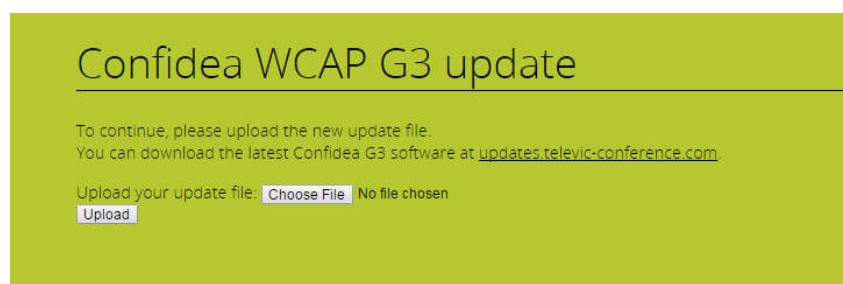

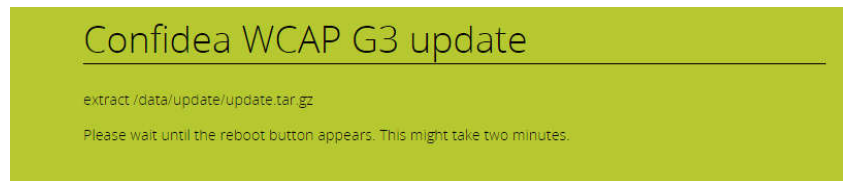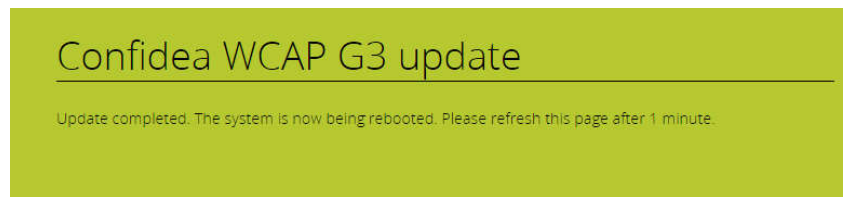7. After +/- 1 min following screen appears**8. After +/- 2 min this screen appears and click on “reboot”****9. Now this screen appears and wcap reboots**


10. Refresh webserver screen and now the normal webserver configuration can be done



11. Check system info if SW version is correct:

System version number should be 2.1.25 or higher


If this is not the case then update has failed, in this case please try update procedure again or contact support-conference@televic.com

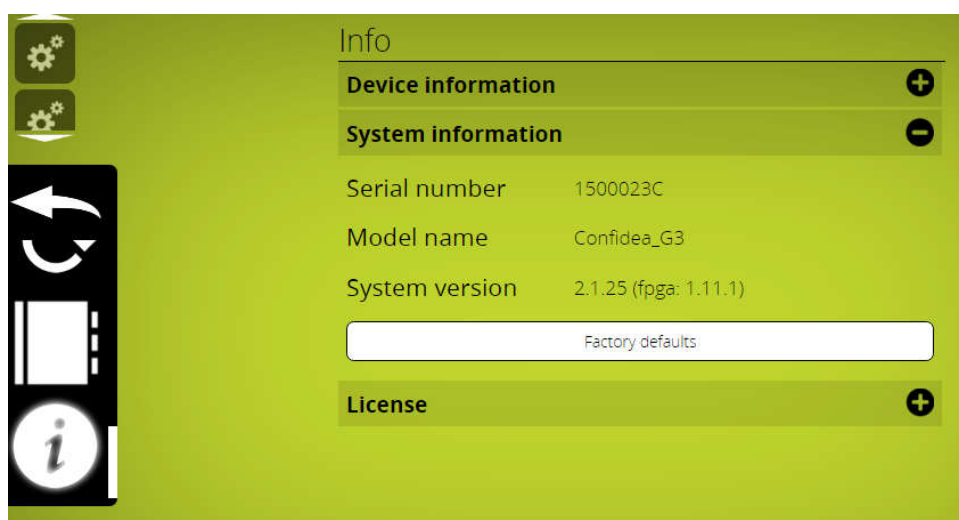


12. Check if fpga version is 1.11.1 or higher
If so , then update is finished

Following steps only needed if fpga is not yet version 1.11.1 or higher


13. Select Update screen and browse to ap.upgrade.tuf + open the file

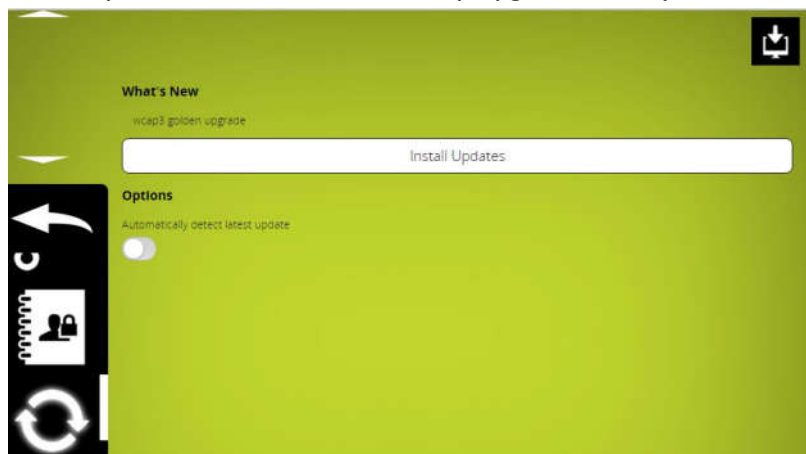

14. After a few seconds the following screen appears

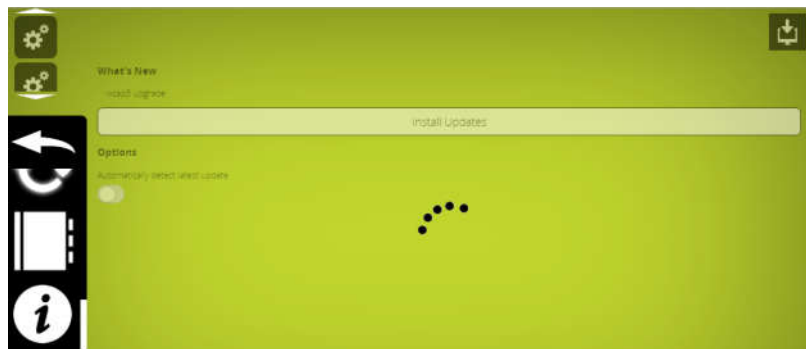

15. +/- 5 min later update is finished and this screen shows up.

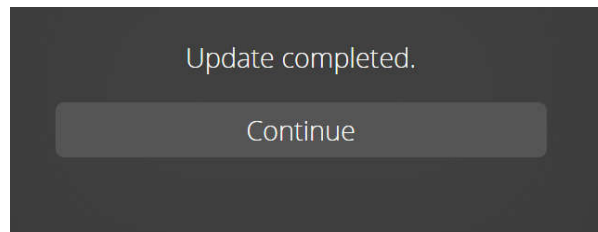

16. Click on "Continue" and check system info if SW version and fpga version is correct:

System version number should be 2.1.25 or higher

Fpga version should be 1.11.1 or higher

If this is not the case then update has failed, in this case please try update procedure again or contact support-conference@televic.com

