

Confidea F-DM Mike

Confidea Flushmount Delegate Microphone Unit



Description

The Confidea F-DM Mike is Televic's microphone panel for basic discussion systems. Its small form factor, housed in an elegant casing, permits a minimalistic integration into any meeting room furniture.

Since the Confidea F-DM Mike panel has no integrated speaker, it is intended for use at venues where a room sound system is already installed.

The panel has a microphone connector to fit the new push-and-lock Mike microphone that reduces setup time. The chairperson version of this panel has additional controls (see Confidea F-CM Mike 71.98.0545).

Benefits

The Confidea F-DM Mike is a sleek and discreet solution that is perfectly suited to conference rooms with an existing sound system.

The unit is available in a variety of custom colors, sizes and finishes to blend in neatly in any environment.

The Confidea F-DM Mike is backed by the Plixus® network and redundant cabling to ensure maximum reliability. Finally, its shielded microphone is immune to mobile phone interference.

Features

- » Basic discussion function
- » Tactile microphone push button with integrated LED
- » Rounded corners for easy installation
- » Trademark natural Televic Sound
- » Available in custom colors, sizes, finishes

Connectivity

» Push & Lock socket to connect a removable microphone:

- Mike LPM	71.98.0091
- Mike PLM301F	71.98.0093
- Mike PLM401F	71.98.0094
- Mike PLM502F	71.98.0095
- Mike PLM602F	71.98.0096
- Mike PLM402F	71.98.0098
- Mike PLM40FF	71.98.0099

- Two RJ 45 connectors for loop through cabling
- Plixus-powered

Software

To fully configure, manage, and use the unit, Televic's CoCon management software is required. The following standard licenses are available:

CoCon Discussion71.98.1101CoCon Signage71.98.1102


Specifications


Mechanical		
Material	Steel	
Color	Tiger coating Carbon 01	
Size (mm)	150 (w) × 50 (h) × 85 (d)	
Size packed (mm)	190 (w) × 85 (h) × 105 (d)	
Weight	280 g	
Weight packed	360 g	
Electrical		
Voltage	48 VDC	
Current consumption	3 W	
Microphone Input		
Dynamic range	> 90 dB	
Frequency response	20-20,000 Hz	
THD @ nominal level	0.1%	


Certification


Region	Certification
Europe	CE

Technical Drawings





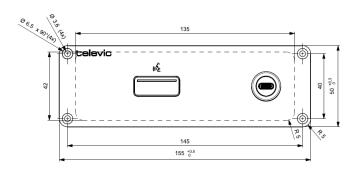



HQ Belgium

+32 51 30 30 45 conference@televic.com https://www.televic.com/en/conference

Asia

+86 21 61 48 01 23 conference@televic.com www.televic-conference.com.cn









France

+33 3 74 09 52 76 conference-france@televic.com www.televic-conference.fr

United States

+1 916 920 0901 conference-us@televic.com All information copyright Televic Conference, 2024. Televic reserves the right to change this document without notice.

Version 1.1