uniCOS F/MM7

Quick Start

uniCOS Flushmount 7 Inch Multimedia Unit

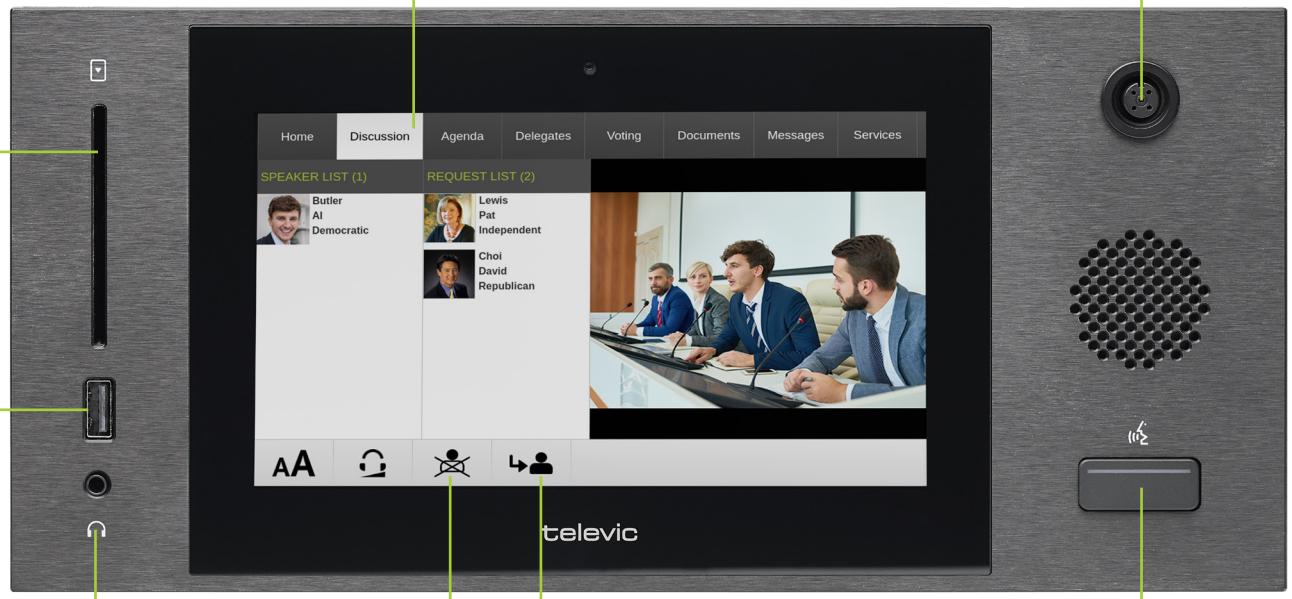

Touch screen interface
Use the interface to participate in the meeting, view meeting related information or change interface settings

Screw lock microphone connector

RFID card reader

USB connector

Headphone connector

PRIOR button *(only for chairperson)*
deactivates the microphone of all active units

NEXT button *(only for chairperson)*
Grants the floor to the next delegate in the request list

Microphone button with Microphone status LED
- **Red**: microphone is active
- **Green**: microphone is in request

televic conference

Discussion
Speaker and request list and video streaming of the meeting

Agenda
All agenda topics with a detailed description per topic

Delegates
General information of all meeting participants

Voting
General information of all meeting participants

Home
General meeting and participant information

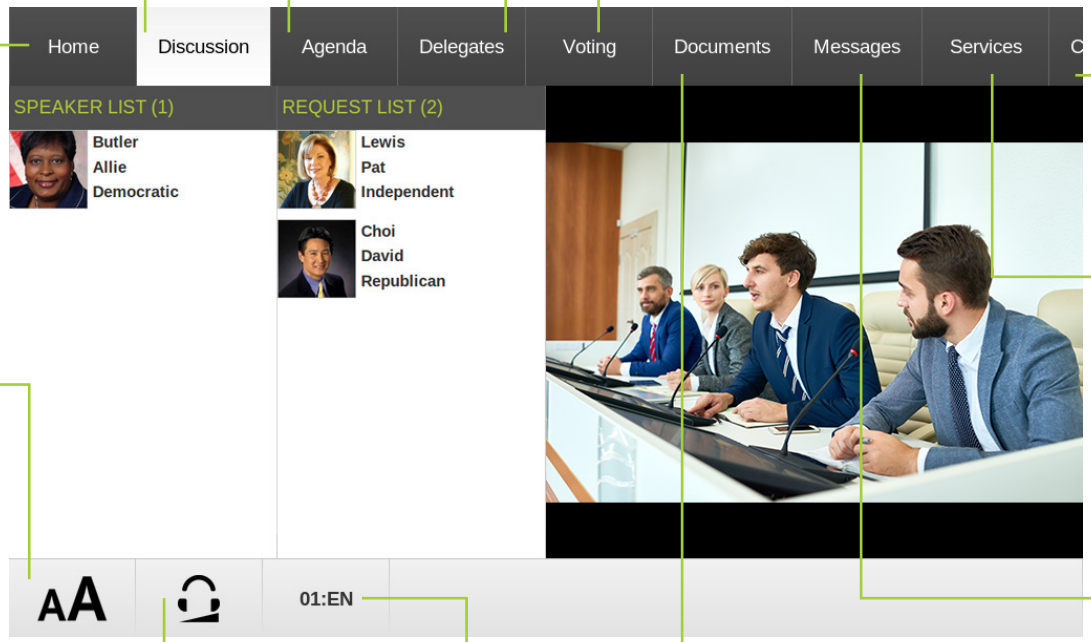

Configuration
Change language settings of interface (**Interface settings**) or keyboard (**Regional settings**)

Interface text size
Tap the icon to open a menu to change the interface text size: Normal, Medium or Large

Services
Use to order coffee or utilize any other available service

Messages
Send and receive message from other meeting participants

Headphone volume
Tap the icon to open a slider to adjust the volume. Drag the slider right or left to increase or decrease the volume

Interpretation channel
Tap the text to open a menu and select an interpretation channel, if available

Documents
View PDF documents made available during the meeting, use pinch to zoom in or out

Product Range Applicability

» uniCOS F/MM 7" (71.98.2002) (configurable as chairperson or delegate unit)

All information copyright Televic Conference, 2018.
Televic reserves the right to change this document without notice.
Version 1.0, 22 January, 2019

Televic Conference
Leo Bekaertlaan 1
8870 Izegem, België

+32 51 30 30 45
conference@televic.com
www.televic-conference.com